

Elbow


BOOK INDEX

SECTION INDEX

ISO 8434-1 / DIN 2353 connection
to BSP parallel male with Viton
captive seal

Fitting body machined from stainless bar

Internal seal - PTFE

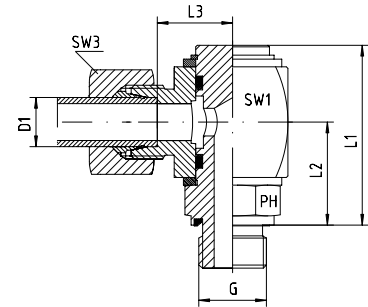

Series	Pressure PB	Tube O.D.		Approx. Dimensions					Part code
		D1	G	L1	L2	L3	SW1	SW3	
L	250	6	1/8"	47.0	26.5	16.5	27	14	DGWE-L-06-G 1/8"-wd
L	250	6	1/4"	47.5	26.5	16.5	27	14	DGWE-L-06-G 1/4"-wd
L	250	6	3/8"	47.5	26.5	16.5	27	14	DGWE-L-06-G 3/8"-wd
L	250	8	1/4"	47.5	26.5	16.5	27	17	DGWE-L-08-G 1/4"-wd
L	250	8	3/8"	47.5	26.5	16.5	27	17	DGWE-L-08-G 3/8"-wd
L	250	10	1/4"	47.5	26.5	17.5	27	19	DGWE-L-10-G 1/4"-wd
L	250	10	3/8"	47.5	26.5	17.5	27	19	DGWE-L-10-G 3/8"-wd
L	250	12	1/4"	47.5	26.5	17.5	27	22	DGWE-L-12-G 1/4"-wd
L	250	12	3/8"	47.5	26.5	17.5	27	22	DGWE-L-12-G 3/8"-wd
L	250	12	1/2"	58.5	33.5	23.0	36	22	DGWE-L-12-G 1/2"-wd
L	250	15	1/2"	58.5	33.5	24.0	36	27	DGWE-L-15-G 1/2"-wd
L	160	18	1/2"	58.5	33.5	23.5	36	32	DGWE-L-18-G 1/2"-wd
L	160	22	3/4"	66.0	38.0	27.5	41	36	DGWE-L-22-G 3/4"-wd
L	100	28	1"	72.0	42.5	29.5	46	41	DGWE-L-28-G 1"-wd
L	100	35	1 1/4"					50	DGWE-L-35-G 1 1/4"-wd
L	100	42	1 1/2"					60	DGWE-L-42-G 1 1/2"-wd

Series	Pressure PB	Tube O.D.		Approx. Dimensions					Part code
		D1	G	L1	L2	L3	SW1	SW3	
S	400	6	1/4"	47.5	26.5	18.5	27	17	DGWE-S-06-G 1/4"-wd
S	400	6	3/8"	47.5	26.5	18.5	27	17	DGWE-S-06-G 3/8"-wd
S	400	8	1/4"	47.5	26.5	18.5	27	19	DGWE-S-08-G 1/4"-wd
S	400	8	3/8"	47.5	26.5	18.5	27	19	DGWE-S-08-G 3/8"-wd
S	400	10	1/4"	47.5	26.5	18.0	27	22	DGWE-S-10-G 1/4"-wd
S	400	10	3/8"	47.5	26.5	18.0	27	22	DGWE-S-10-G 3/8"-wd
S	400	12	3/8"	47.5	26.5	18.0	27	24	DGWE-S-12-G 3/8"-wd
S	400	14	1/2"	58.5	33.5	25.0	36	27	DGWE-S-14-G 1/2"-wd
S	400	16	1/2"	58.5	33.5	24.5	36	30	DGWE-S-16-G 1/2"-wd
S	250	20	3/4"	66.0	38.0	26.5	41	36	DGWE-S-20-G 3/4"-wd
S	250	25	1"	72.0	42.5	29.0	46	46	DGWE-S-25-G 1"-wd
S	250	30	1 1/4"					50	DGWE-S-30-G 1 1/4"-wd
S	250	38	1 1/2"					60	DGWE-S-38-G 1 1/2"-wd

Fittings can be supplied with nuts with silver-plated threads to help to prevent galling, or can be supplied body only - no nut or cutting ring.

If you require silver-plated nuts, use suffix -SC. If you require body only, use suffix -OMD.

Eg. DGWE-L-12-G 1/2"-wd-SC, or DGWE-L-12-G 1/2"-wd-OMD.