

## 2-way high pressure lever operated SAE flanged ball valve

BOOK INDEX


SECTION INDEX

Flanged connections to  
SAE J518 / DIN 6162

3000 & 6000 psi rated

use with split flanges on page 2.55

Ball seal is POM, stem seal is NBR

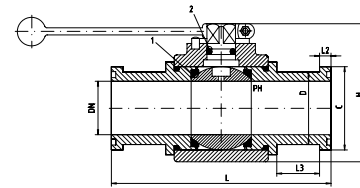

Pressure PB	DN	Approx. Dimensions						Part code
		C	D	H	L	L 2	L 3	
315	13	30.2	24	51.0	151.0	6.7	35	FKH-3000-1/2"-4423
315	20	38.1	32	73.0	162.0	6.7	35	FKH-3000-3/4"-4423
315	24	44.4	38	76.0	178.0	8.0	35	FKH-3000-1"-4423
250	32	50.8	43	105.0	190.5	8.0	35	FKH-3000-1 1/4"-4423
200	38	60.3	50	111.4	231.0	8.0	40	FKH-3000-1 1/2"-4423
200	48	71.4	62	130.0	232.0	9.5	45	FKH-3000-2"-4423
400	13	31.7	24	51.0	151.0	7.7	35	FKH-6000-1/2"-4423
400	20	41.3	32	73.0	174.0	8.8	40	FKH-6000-3/4"-4423
400	24	47.6	38	76.0	198.0	9.5	40	FKH-6000-1"-4423
400	32	54.0	44	105.0	223.0	10.3	45	FKH-6000-1 1/4"-4423
400	38	63.5	51	111.4	281.0	12.6	70	FKH-6000-1 1/2"-4423
400	48	79.4	67	130.0	316.0	12.6	80	FKH-6000-2"-4423