

**Interlock series, for high pressures.**

DIN 2353 metric compression swivel female


L series - straight

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

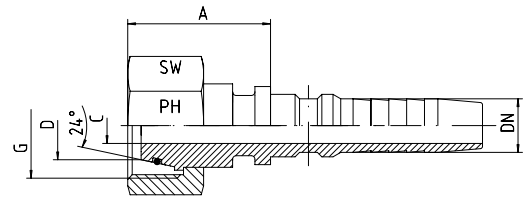

3

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions			Part code
				A	C	SW	
19	3/4"	M 30 x 2	22	38.5	14.5	36	I-DKOL-22-DN 19
25	1"	M 36 x 2	28	38.0	20.0	41	I-DKOL-28-DN 25
31	1 1/4"	M 45 x 2	35	42.0	25.0	50	I-DKOL-35-DN 31
38	1 1/2"	M 52 x 2	42	41.0	31.5	60	I-DKOL-42-DN 38