

**Interlock series, for high pressures.**

DIN 2353 metric compression swivel female


S series - swept 45°

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

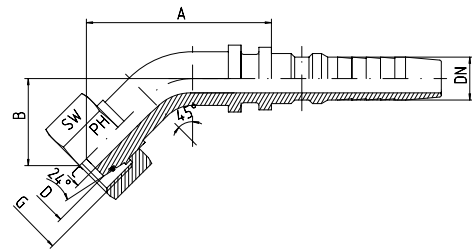

3

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions				Part code
				A	B	C	SW	
19	3/4"	M 30 x 2	20	100	45	14.5	36	I-DKOS-20-45°-DN 19
19	3/4"	M 36 x 2	25	90	40	14.5	46	I-DKOS-25-45°-DN 19
25	1"	M 36 x 2	25	103	52	20.0	46	I-DKOS-25-45°-DN 25
25	1"	M 42 x 2	30	97	43	20.0	50	I-DKOS-30-45°-DN 25
31	1 1/4"	M 52 x 2	38	117	52	25.0	60	I-DKOS-38-45°-DN 31
38	1 1/2"	M 68 x 2	50	136	53	31.0	80	I-DKOS-50-45°-DN 38