

## JIC 37° Swivel Female Interlock Insert

BOOK INDEX

SECTION INDEX

**Interlock series, for high pressures.**


37° JIC swivel female - swept 45°

ISO 8434-2 / J514

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

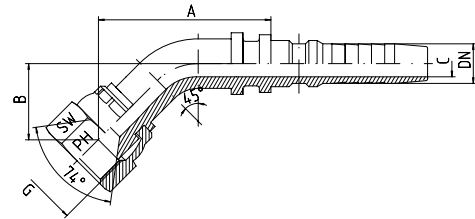

3

Hose DN	Bore in.	Thread G = UN	Approx. Dimensions				Part code
			A	B	C	SW	
19	3/4"	1 1/16"-12	93.0	37.5	14.5	32	I-DKJ-1 1/16"-45°-DN 19
19	3/4"	1 5/16"-12	93.0	43.5	14.5	41	I-DKJ-1 5/16"-45°-DN 19
25	1"	1 5/16"-12	101.0	47.0	20.0	41	I-DKJ-1 5/16"-45°-DN 25
25	1"	1 5/8"-12	123.0	51.0	20.0	50	I-DKJ-1 5/8"-45°-DN 25
31	1 1/4"	1 5/8"-12	116.5	49.0	25.0	50	I-DKJ-1 5/8"-45°-DN 31
31	1 1/4"	1 7/8"-12	146.0	52.0	25.0	60	I-DKJ-1 7/8"-45°-DN 31
38	1 1/2"	1 7/8"-12	130.0	50.0	31.0	60	I-DKJ-1 7/8"-45°-DN 38
38	1 1/2"	2 1/2"-12					I-DKJ-2 1/2"-45°-DN 38
51	2"	2 1/2"-12	166.5	78.0	41.0	70	I-DKJ-2 1/2"-45°-DN 51