

JIC 37° Swivel Female Interlock Insert

BOOK INDEX

SECTION INDEX

Interlock series, for high pressures.


37° JIC swivel female - swept 90°

ISO 8434-2 / J514

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

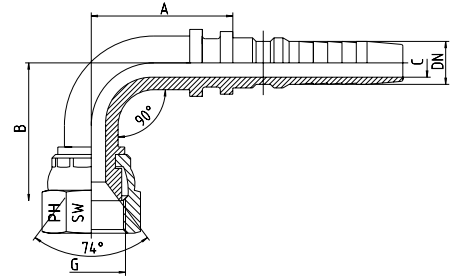

3

Hose DN	Bore in.	Thread G = UN	Approx. Dimensions				Part code
			A	B	C	SW	
19	3/4"	1 1/16"-12	79	72.0	14.5	32	I-DKJ-1 1/16"-90°-DN 19
19	3/4"	1 5/16"-12	78	79.0	14.5	41	I-DKJ-1 5/16"-90°-DN 19
25	1"	1 5/16"-12	85	86.0	20.0	41	I-DKJ-1 5/16"-90°-DN 25
25	1"	1 5/8"-12	107	93.0	20.0	50	I-DKJ-1 5/8"-90°-DN 25
31	1 1/4"	1 5/8"-12	103	96.0	25.0	50	I-DKJ-1 5/8"-90°-DN 31
31	1 1/4"	1 7/8"-12	125	98.0	25.0	60	I-DKJ-1 7/8"-90°-DN 31
38	1 1/2"	1 7/8"-12	122	107.0	31.0	60	I-DKJ-1 7/8"-90°-DN 38
38	1 1/2"	2 1/2"-12					I-DKJ-2 1/2"-90°-DN 38
51	2"	2 1/2"-12	145	151.5	41.0	70	I-DKJ-2 1/2"-90°-DN 51