

BSPP 60° Swivel Female (with O-ring) Interlock Insert

BOOK INDEX

SECTION INDEX


Interlock series, for high pressures.

BSPP O-ring 60° coned swivel female - swept 45°

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

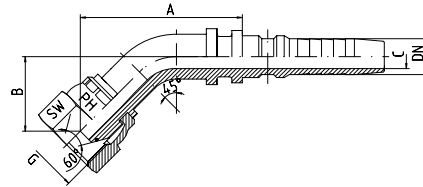

3

Hose DN	Bore in.	Thread G	Approx. Dimensions				Part code
			A	B	C	SW	
19	3/4"	3/4"-14	90	39	14.5	32	I-DKOR-3/4"-45°-DN 19
25	1"	1"-11	97	46	20.0	41	I-DKOR-1"-45°-DN 25
31	1 1/4"	1 1/4"-11	117	52	25.0	50	I-DKOR-1 1/4"-45°-DN 31
38	1 1/2"	1 1/2"-11	134	49	31.0	60	I-DKOR-1 1/2"-45°-DN 38
51	2"	2"-11	170	81	41.0	70	I-DKOR-2"-45°-DN 51