

Interlock series, for high pressures.

DIN 2353 metric compression male


S series - straight

ISO 8434-1 / DIN 2353

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

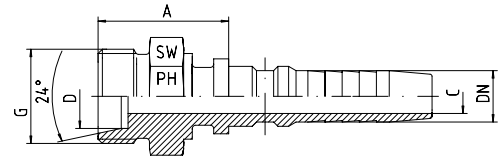

Hose DN	Bore in.	Thread G	Tube O.D. D	Approx. Dimensions			Part code
				A	C	SW	
19	3/4"	M 30 x 2	20	37.5	14.5	32	I-CES-20-DN 19
19	3/4"	M 36 x 2	25	36.0	14.5	36	I-CES-25-DN 19
25	1"	M 36 x 2	25	43.0	20.0	36	I-CES-25-DN 25
25	1"	M 42 x 2	30	40.0	20.0	46	I-CES-30-DN 25
31	1 1/4"	M 52 x 2	38	44.5	25.0	55	I-CES-38-DN 31