

BSPP 60° Coned Male Interlock Insert

BOOK INDEX

SECTION INDEX

Interlock series, for high pressures.


BSPP 60° coned male - straight

ISO 8434-6 / BS 5200

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

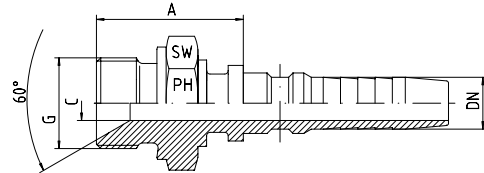

3

Hose DN	Bore in.	Thread G	Approx. Dimensions			Part code
			A	C	SW	
19	3/4"	3/4"-14	40.5	14.5	32	I-AGR-3/4"-DN 19
19	3/4"	1"-11	44.5	14.5	41	I-AGR-1"-DN 19
25	1"	1"-11	48.5	20.0	41	I-AGR-1"-DN 25
31	1 1/4"	1 1/4"-11	44.0	25.0	50	I-AGR-1 1/4"-DN 31
38	1 1/2"	1 1/2"-11	54.0	31.5	55	I-AGR-1 1/2"-DN 38
51	2"	2"-11	52.5	42.0	70	I-AGR-2"-DN 51