

## NPT Male Interlock Insert

BOOK INDEX

SECTION INDEX


### Interlock series, for high pressures.

NPT 60° coned male - straight

Specifically designed for use with ferrules

P4, P6 or P7 - pp. 3.02 to 3.04.

Hoses must be skived internally and externally.

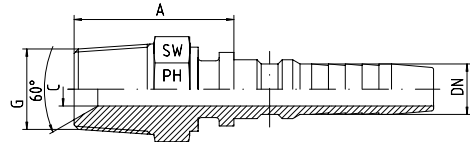

3

| Hose DN | Bore in. | Thread G = NPT | Approx. Dimensions |      |    | Part code          |
|---------|----------|----------------|--------------------|------|----|--------------------|
|         |          |                | A                  | C    | SW |                    |
| 19      | 3/4"     | 3/4"-14        | 41.0               | 14.5 | 30 | I-AGN-3/4"-DN 19   |
| 19      | 3/4"     | 1"-11.5        |                    | 14.5 | 36 | I-AGN-1"-DN 19     |
| 25      | 1"       | 1"-11.5        | 65.5               | 20.0 | 36 | I-AGN-1"-DN 25     |
| 31      | 1 1/4"   | 1 1/4"-11.5    | 53.0               | 25.0 | 46 | I-AGN-1 1/4"-DN 31 |
| 38      | 1 1/2"   | 1 1/2"-11.5    | 60.5               | 31.0 | 50 | I-AGN-1 1/2"-DN 38 |
| 51      | 2"       | 2"-11.5        | 53.0               | 42.0 | 65 | I-AGN-2"-DN 51     |