

37° flare adapter set


BOOK INDEX

SECTION INDEX

37° flare adapters used in conjunction with ISO 8434-1 / DIN 2353 fitting bodies

Supplied with NBR O-ring, Viton upon request

Port to W DIN 3861

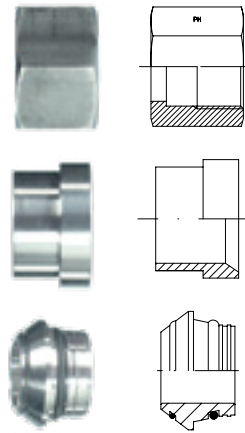

Series	Pressure PN	Tube O.D. D1 + Tol.	Thread G	L	L1	L2	d	SW	Part code
L	500	6	M 12 x 1.5	17.0	11.5	10.5	3	14	BAN-06-L
L	500	8	M 14 x 1.5	18.0	12.0	11.0	5	17	BAN-08-L
L	500	10	M 16 x 1.5	19.5	12.5	12.5	6	19	BAN-10-L
L	400	12	M 18 x 1.5	20.5	12.5	13.0	8	22	BAN-12-L
L	400	15	M 22 x 1.5	23.0	12.5	14.0	11	27	BAN-15-L
L	400	18	M 26 x 1.5	23.0	13.0	14.5	14	32	BAN-18-L
L	315	22	M 30 x 2	27.5	14.2	18.0	17	36	BAN-22-L
L	250	28	M 36 x 2	27.5	14.7	17.0	23	41	BAN-28-L
L	250	35	M 45 x 2	30.0	18.5	19.0	28	50	BAN-35-L
L	250	42	M 52 x 2	34.0	20.5	21.0	35	60	BAN-42-L

Series	Pressure PN	Tube O.D. D1 + Tol.	Thread G	L	L1	L2	d	SW	Part code
S	800	6	M 14 x 1.5	18.0	11.5	10.5	3	17	BAN-06-S
S	800	8	M 16 x 1.5	20.0	12.0	11.0	5	19	BAN-08-S
S	800	10	M 18 x 1.5	20.5	12.5	12.5	6	22	BAN-10-S
S	630	12	M 20 x 1.5	21.0	12.5	13.0	8	24	BAN-12-S
S	630	14	M 22 x 1.5	23.0	14.0	14.5	9	27	BAN-14-S
S	630	16	M 24 x 1.5	26.5	15.0	17.0	11	30	BAN-16-S
S	420	20	M 30 x 2	27.5	18.5	17.5	14	36	BAN-20-S
S	420	25	M 36 x 2	30.5	20.0	20.0	19	46	BAN-25-S
S	420	30	M 42 x 2	32.0	22.0	21.5	23	50	BAN-30-S
S	420 (1)	38	M 52 x 2	38.0	26.0	26.5	30	60	BAN-38-S

(1) In the 420 bar section, the normal safety factor of 4:1 is reduced to 3:1.