

Adjustable standpipe reducer


BOOK INDEX

SECTION INDEX

to ISO 8434-1 / DIN 2353

S series

The swivel female must be finally assembled with a 1/2 turn after torque increases.

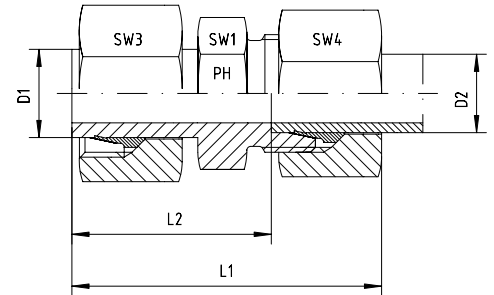

Series	Pressure PN	Tube O.D. D1	Tube O.D. D2	Approx. Dimensions					Part code
				L1	L2	SW1	SW3	SW4	
S	630	8	6	47.0	32.0	14	19	17	KOR-S-08/06
S	630	10	6	48.0	33.0	14	22	17	KOR-S-10/06
S	630	10	8	48.0	33.0	17	22	19	KOR-S-10/08
S	630	12	6	50.0	35.0	14	24	17	KOR-S-12/06
S	630	12	8	50.0	35.0	17	24	19	KOR-S-12/08
S	630	12	10	51.0	34.5	19	24	22	KOR-S-12/10
S	630	14	6	50.0	35.0	17	27	17	KOR-S-14/06
S	630	14	8	50.0	35.0	17	27	19	KOR-S-14/08
S	630	14	10	51.0	34.5	19	27	22	KOR-S-14/10
S	630	14	12	51.0	34.5	22	27	24	KOR-S-14/12
S	400	16	6	54.0	39.0	17	30	17	KOR-S-16/06
S	400	16	8	54.0	39.0	17	30	19	KOR-S-16/08
S	400	16	10	55.0	38.5	19	30	22	KOR-S-16/10
S	400	16	12	55.0	38.5	22	30	24	KOR-S-16/12
S	400	16	14	58.0	40.0	22	30	27	KOR-S-16/14
S	400	20	6	58.5	43.5	22	36	17	KOR-S-20/06
S	400	20	8	58.5	43.5	22	36	19	KOR-S-20/08
S	400	20	10	59.5	43.0	22	36	22	KOR-S-20/10
S	400	20	12	59.5	43.0	22	36	24	KOR-S-20/12
S	400	20	14	60.5	42.5	22	36	27	KOR-S-20/14
S	400	20	16	63.0	44.5	24	36	30	KOR-S-20/16
S	400	25	6	59.0	44.0	27	46	17	KOR-S-25/06
S	400	25	8	59.0	44.0	27	46	19	KOR-S-25/08
S	400	25	10	61.0	44.5	27	46	22	KOR-S-25/10
S	400	25	12	63.0	46.5	27	46	24	KOR-S-25/12
S	400	25	14	64.0	46.0	27	46	27	KOR-S-25/14
S	400	25	16	67.0	48.5	27	46	30	KOR-S-25/16
S	400	25	20	70.0	48.5	30	46	36	KOR-S-25/20
S	400	30	6	69.0	54.0	32	50	17	KOR-S-30/06
S	400	30	8	69.0	54.0	32	50	19	KOR-S-30/08
S	400	30	10	70.0	53.5	32	50	22	KOR-S-30/10
S	400	30	12	70.0	53.5	32	50	24	KOR-S-30/12
S	400	30	14	71.0	53.0	32	50	27	KOR-S-30/14
S	400	30	16	73.0	54.5	32	50	30	KOR-S-30/16
S	400	30	20	76.0	54.5	32	50	36	KOR-S-30/20
S	400	30	25	81.5	57.5	36	50	46	KOR-S-30/25
S	250	38	6	70.0	55.0	41	60	17	KOR-S-38/06
S	250	38	8	70.0	55.0	41	60	19	KOR-S-38/08
S	250	38	10	71.0	54.5	41	60	22	KOR-S-38/10
S	250	38	12	71.0	54.5	41	60	24	KOR-S-38/12
S	250	38	14	74.0	56.0	41	60	27	KOR-S-38/14
S	250	38	16	74.0	55.5	41	60	30	KOR-S-38/16
S	250	38	20	79.0	57.5	41	60	36	KOR-S-38/20
S	250	38	25	84.0	60.0	41	60	46	KOR-S-38/25
S	250	38	30	87.0	60.5	46	60	50	KOR-S-38/30