


24° female and Viton O-ring
with a profile to W DIN 3861
BSP parallel male thread with
Viton elastomeric soft seal

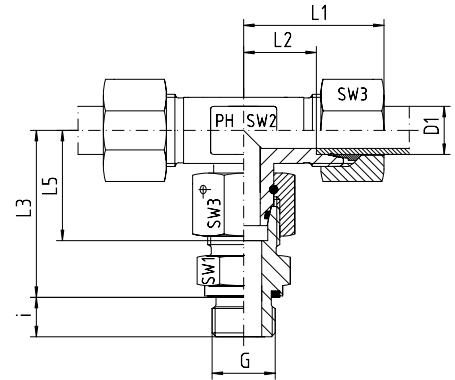

| Series | Pressure PN | Tube O.D. D1 | Thread G | Approx. Dimensions | | | | | | | | Part code |
|--------|----------------|-----------------|-------------|--------------------|------|------|------|----|-----|-----|-----|------------------------|
| | | | | L1 | L2 | L3 | L5 | i | SW1 | SW2 | SW3 | |
| L | 500 | 6 | G 1/8" | 27 | 12.0 | 34.5 | 26.0 | 8 | 14 | 12 | 14 | ET-DKOL-06-G 1/8"-wd |
| L | 500 | 8 | G 1/4" | 29 | 14.0 | 37.5 | 27.5 | 12 | 17 | 12 | 17 | ET-DKOL-08-G 1/4"-wd |
| L | 500 | 10 | G 1/4" | 30 | 15.0 | 40.0 | 29.0 | 12 | 19 | 14 | 19 | ET-DKOL-10-G 1/4"-wd |
| L | 400 | 12 | G 3/8" | 32 | 17.0 | 42.0 | 29.5 | 12 | 22 | 17 | 22 | ET-DKOL-12-G 3/8"-wd |
| L | 400 | 15 | G 1/2" | 36 | 21.0 | 46.5 | 32.5 | 14 | 27 | 19 | 27 | ET-DKOL-15-G 1/2"-wd |
| L | 400 | 18 | G 1/2" | 40 | 23.5 | 50.0 | 35.5 | 14 | 27 | 24 | 32 | ET-DKOL-18-G 1/2"-wd |
| L | 250 | 22 | G 3/4" | 44 | 27.5 | 65.0 | 38.5 | 16 | 32 | 27 | 36 | ET-DKOL-22-G 3/4"-wd |
| L | 250 | 28 | G 1" | 47 | 30.5 | 59.0 | 41.5 | 18 | 41 | 36 | 41 | ET-DKOL-28-G 1"-wd |
| L | 250 | 35 | G 1 1/4" | 56 | 34.5 | 68.5 | 51.0 | 20 | 50 | 41 | 50 | ET-DKOL-35-G 1 1/4"-wd |
| L | 250 | 42 | G 1 1/2" | 63 | 40.0 | 75.0 | 56.0 | 22 | 55 | 50 | 60 | ET-DKOL-42-G 1 1/2"-wd |

| Series | Pressure PN | Tube O.D. D1 | Thread G | Approx. Dimensions | | | | | | | | Part code |
|--------|----------------|-----------------|-------------|--------------------|------|------|------|----|-----|-----|-----|------------------------|
| | | | | L1 | L2 | L3 | L5 | i | SW1 | SW2 | SW3 | |
| S | 800 | 6 | G 1/4" | 31 | 16.0 | 40.0 | 27.0 | 12 | 19 | 12 | 17 | ET-DKOS-06-G 1/4"-wd |
| S | 800 | 8 | G 1/4" | 32 | 17.0 | 42.5 | 27.5 | 12 | 19 | 14 | 19 | ET-DKOS-08-G 1/4"-wd |
| S | 800 | 10 | G 3/8" | 34 | 17.5 | 45.0 | 30.0 | 12 | 22 | 17 | 22 | ET-DKOS-10-G 3/8"-wd |
| S | 630 | 12 | G 3/8" | 38 | 21.5 | 48.0 | 31.0 | 12 | 22 | 17 | 24 | ET-DKOS-12-G 3/8"-wd |
| S | 630 | 14 | G 1/2" | 40 | 22.0 | 54.0 | 35.0 | 14 | 27 | 19 | 27 | ET-DKOS-14-G 1/2"-wd |
| S | 630 | 16 | G 1/2" | 43 | 24.5 | 55.0 | 36.5 | 14 | 27 | 24 | 30 | ET-DKOS-16-G 1/2"-wd |
| S | 420 | 20 | G 3/4" | 48 | 26.5 | 65.0 | 44.5 | 16 | 32 | 27 | 36 | ET-DKOS-20-G 3/4"-wd |
| S | 420 | 25 | G 1" | 54 | 30.0 | 73.0 | 50.0 | 18 | 41 | 36 | 46 | ET-DKOS-25-G 1"-wd |
| S | 420 | 30 | G 1 1/4" | 62 | 35.5 | 78.5 | 55.0 | 20 | 50 | 41 | 50 | ET-DKOS-30-G 1 1/4"-wd |
| S | 420 | 38 | G 1 1/2" | 72 | 41.0 | 89.0 | 63.0 | 22 | 55 | 50 | 60 | ET-DKOS-38-G 1 1/2"-wd |